



Panel Light

The Pollux series LED panel lights offer flexibility for consumers wanting to replace less efficient fluorescent tubes.



Características

- Diseño delgado, compacto y de moda
- Bajo consumo de energía
- Estructura elegante, diseñado para disipar el calor
- 6x vida útil más larga que las lámparas fluorescentes: 30.000 horas
- Disponible en 3 diferentes temperaturas de color
- El reemplazo ideal para las luces de tubo y las luces de la red
- Respetuoso del medio ambiente: No UV, no IR y sin mercurio

Specifications

Type	GL-PL0303-WW	GL-PL0303-NW	GL-PL0303-CW
Energy Used	16.5W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	0.9 @115V AC, 0.7@230V AC		
CCT(color)	3000K	4000K	6000K
Luminous Flux (lm)	770 lm	830lm	1070lm
Luminous Efficacy	46.7lm/W	50.3lm/W	64.8lm/W
CRI	80	80	70
Dimension	295 x 295 x 13mm		
Beam Angle	120 Degrees		
Net Weight	1 PCS with driver = 1.1kgs		

Specifications

Type	GL-PL0306-WW	GL-PL0306-NW	GL-PL0306-CW
Energy Used	25W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	0.9 @115V AC, 0.7@230V AC		
CCT(color)	3000K	4000K	6000K
Luminous Flux (lm)	1150lm	1250lm	1420lm
Luminous Efficacy	46.0lm/W	50.0lm/W	56.8lm/W
CRI	80	80	70
Dimension	295 x 595 x 13mm		
Beam Angle	120 Degree		
Net Weight	2.0KG (Driver Included)		

Specifications

Type	GL-PL0312-WW	GL-PL0312-NW	GL-PL0312-CW
Energy Used	58W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	>0.95		
CCT (color)	3000K	4000K	5700K
Luminous Flux (lm)	3200lm	3200lm	3800lm
Luminous Efficacy	55 lm/W	55 lm/W	66 lm/W
CRI	80	80	70
Dimension	295 x 1195 x 13mm		
Beam Angle	120		
Net Weight	4.1Kg		


Specifications

Type	GL-PL0606A-WW	GL-PL0606A-NW	GL-PL0606A-CW
Energy Used	50W		
Rated Life	30,000 Hours		
Input Voltage	100-240V AC		
Power Factor (PF)	>0.95		
CCT(Color)	3000K	4000K	6000K
Luminous Flux (lm)	2400lm	2400lm	3400lm
Luminous Efficacy	48lm/W	48lm/W	68lm/W
CRI	80	80	70
Dimension	595 x 595 x 13mm		
Beam Angle	120°		
Net. Weight	4KG(include led driver)		


Modelo PL0303 6000K

Angle= 112.0 Deg


Height	E Max.	Diameter
1.0M	412 Lx	297 cm
2.0M	103 Lx	593 cm
3.0M	46 Lx	890 cm
4.0M	26 Lx	1186 cm
5.0M	16 Lx	1483 cm

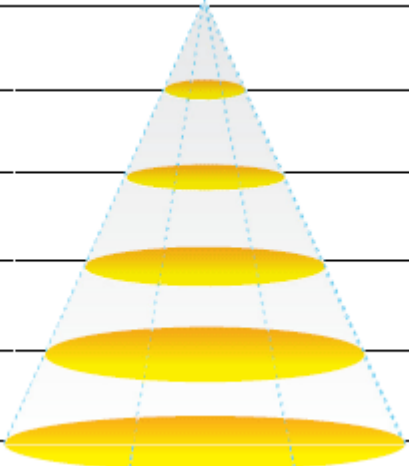

Modelo PL0306 6000K

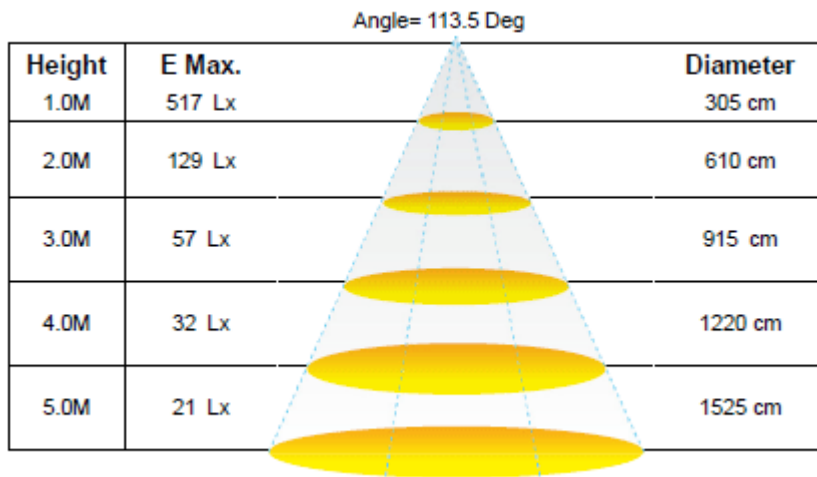


Modelo PL0312 5700K

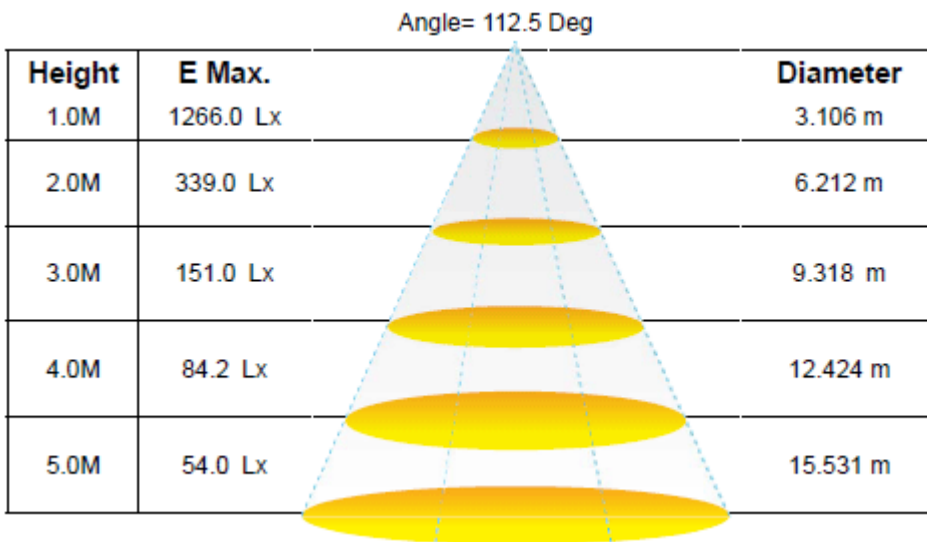

Modelo PL0606 6000K

Angle= 115.9 Deg
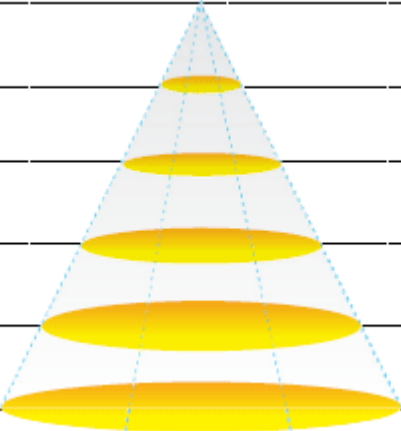
<i>Height</i>	<i>E Max.</i>		<i>Diameter</i>
1.0M	1109 Lx		319cm
2.0M	277 Lx		639cm
3.0M	123 Lx		958cm
4.0M	69 Lx		1278cm
5.0M	44 Lx		1597cm

